



## Weather Guard

Wallmaax Weather Guard Exterior Emulsion Paint is an acrylic emulsion based paint that possesses superior external durability. It keeps and maintains the exterior beauty of buildings which are affecting varying weather conditions. It is water, alkali and dirt resistant and also possesses anti-algal / antifungal properties. It gives a smooth long lasting sheen finish to the exterior walls.



### Salient Features

- Weather Guard is specially formulated to withstand the harsh weather conditions of high rainfall, humidity and heat.
- Weatherguard provides excellent resistance to growth of algae and fungi on the walls. This prevents appearance of black spots on walls due to algal.
- Weatherguard provides extremely good protection against alkali and UV degradation ensuring an original appearance for a long period.
- Weatherguard is designed to give excellent dirt pick up resistance – both inorganic and organic dirt resistant product.


Drying time



**4 - 6**  
Hours

### Product Features

#### Available Packs

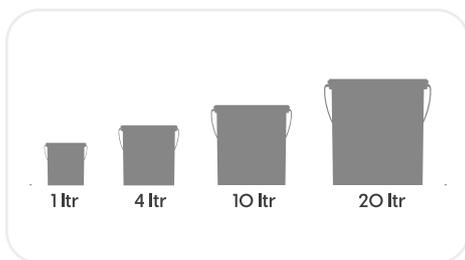

#### Available Colors

**2000+**



\*Currently available in more than 2000+ shades as per the Wallmaax Paints Colour Symphony.

#### Coverage



1 COAT  
**110 - 130 sq.ft/ltr\***  
2 COAT  
**55 - 65 sq.ft/ltr\***

\* Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

#### Application areas

- Any concrete structure prone to be affected by damp or already affected
- Bathroom, Kitchen, Wash places, Exterior walls of Water Tanks
- Exterior walls, Interior walls
- Basement & retaining walls, etc.
- Surface protection system of structural concrete from rising dampness



## PRE PAINTING STEPS



New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water followed by application of Wallmaax Paints Biopack.



When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Wallmaax's Exterior Sealer.



For cracks upto 3mm use Wallmaax's Crack Sealant. For holes and dents use polymer modified cement sand mortar is recommended for better results.

Wallmaax Weatherguard should not be applied on surfaces / substrates that are subjected to continuous seepage and dampness.

## APPLICATION PARAMETERS

### APPLICATION

STEP 1  
For fresh & repainting application:  
Brush / Roller

Cement Primer Exterior

### THINNER

Water

### DILUTION %

1 : 1 (v/v)

### APPLICATION VISCOSITY

NA

### RECOATING PERIOD

4 - 5 Hrs

### STEP 2

Two coats of Wallmaax Weatherguard  
Brush/Roller/Spray

Water

Brush/Roller & Spray :  
40% Max

Brush Roller 35 - 45 Secs

Spray 20 - 25 Secs

4 - 5 Hrs

## POST PAINTING CARE

For the best performance of the paint, ensure proper washing of the painting surface and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

## TECHNICAL DETAILS

- Drying time:** Surface dry time 30 min
- Sheen levels:** Up to 10 - 15 at 60 deg GH
- Flash point IS101/1987 Part 1, Sec 6:** NA
- Stability of thinned paint:** To be used within 24 hours after thinning

## PRECAUTIONS

- » Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- » Do not over-thin or over-extend the brush.
- » Stir well and strain before use.
- » Tinted paints need thorough shaking immediately after tinter addition as well as before use.

## SAFETY FEATURES

- » Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- » Do not apply during rain or when rain is expected.
- » Do not over-thin or over-extend the brush.
- » Protect freshly painted surface from rains till the surface gets completely dry.
- » Stir well and strain before use for top coat.
- » Tinted paints need thorough shaking immediately after tinter addition as well as before use.

for online shop search

[www.shop.wallmaaxpaints.com](http://www.shop.wallmaaxpaints.com)



or scan here

