



## TILE MAAX EXTERIOR EMULSION

Wallmaax Paints Tile Maax is a water-based high performance coating for roof tiles, Kerala bricks and non-porous baked clay tiles.



**LEAD FREE\* GUARANTEE**

\* All Wallmaax Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2016.



### SALIENT FEATURES

#### Strong Water Repellence

It has excellent water repellency property and provides excellent resistance against algal and fungal growth.

#### Adhesion


The Tilemaax film has better adhesion on tiles, crack bridging abilities and a tough film.

#### Long Lasting

Wallmaax Paints Tilemaax incorporates the latest state of the art technology to provide long lasting performance in the most tropical and harsh conditions.

### PRODUCT FEATURES

#### Available Packs

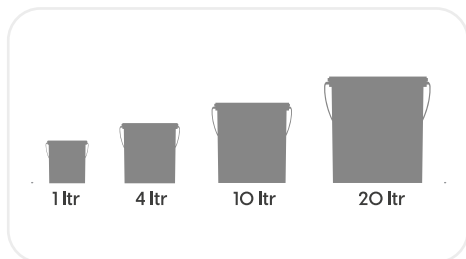

#### Available Colors

**2000+**

\* Currently available in more than 2000+ shades as per the Wallmaax Paints Colour Symphony.

#### Finish

▷ Soft Sheen ▷ Smooth

#### Coverage

On normal masonry surface by brushing




**1 COAT**  
**9 - 11 sq.m/ltr\*\***

**2 COAT**  
**4.5 - 5.5 sq.m/ltr\*\***

\* Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

### PRE PAINTING STEPS



**PLASTER** New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



**CLEANING** Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Wallmaax Paints DampProof to limit further dampness.



When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Wallmaax Paints Exterior Sealer.

**FILLING FOR CRACKS** For filling cracks upto 3mm use Wallmaax Paints Crack Seal.



**FILLING FOR HOLES & DENTS** In case of dents and holes use Wallmaax Paints Wall Putty or white cement and fine sand in the ratio 1:3

**Tile Maax should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.**

### APPLICATION PARAMETERS

#### APPLICATION

STEP 1  
FIRST COAT  
WALLMAAX PAINTS  
TILE MAAX  
BRUSH / SPRAY

STEP 2  
SECOND COAT  
WALLMAAX PAINTS  
TILE MAAX  
BRUSH / SPRAY

#### THINNER

WATER

WATER

#### DILUTION % (BY VOLUME)

30%

30%

#### APPLICATION<sup>1</sup> VISCOSITY(SEC)

PASTE FORM

PASTE FORM

#### RECOATING PERIOD<sup>2</sup> (HOURS)

4 - 6 HRS

4 - 6 HRS

1. As measured through a Ford cup.

2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.

3. For best results, it is advisable to apply Apex Tile Guard on both sides of a roof tile individually before laying.



## ADDITIONAL INFORMATION

### POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

### TECHNICAL DETAILS

- 1. Drying time:** Surface dry time 30 min
- 2. Flash point ISO1/1987 Part 1, Sec 6:** NA
- 3. Stability of thinned paint:** To be used within 24 hours
- 4. Shelf life:** 2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

### PRECAUTIONS

- » Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- » Do not over-thin or over-extend the brush.
- » Tint using Wallmaax Paints machine colourants only.
- » Stir well and strain before use.
- » Tinted paints need thorough shaking immediately after tinter addition as well as before use.

### SAFETY FEATURES

- » Kindly refer to the MSDS for Wallmaax Paints TileMaax which gives detailed information on safety measures while handling the paint, which is available on request.
- » Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- » Keep out of reach of children and away from eatables.
- » May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- » Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- » In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- » Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- » Do not pour leftover paint down the drain or in water courses.
- » In the event of spills, contain spillage using sand or earth.
- » No added Lead, Mercury or Chromium compounds.

for online shop  
search

[www.shop.wallmaaxpaints.com](http://www.shop.wallmaaxpaints.com)



or scan  
here

